


QPMEV 125HYP



2025

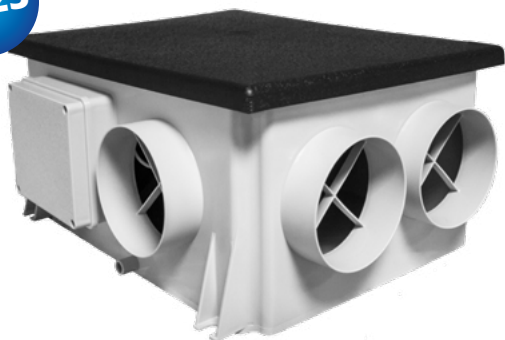

SINGLE FLOW EXTRACT VENTILATION UNIT

APPLICATION

Whole-house mechanical extract unit, suitable for wall, ceiling and floor installation, for horizontal or vertical mounting.

Designed to be connected to self-adjusting extracts.

SPECIFICATION

Outer fan casing made of a single body of polypropylene (PP), color RAL 7035 to ensure maximum tightness.

Top cover shall be made from strong durable ABS plastic.

EC external rotor motors fitted as standard for energy saving. Provided with integral thermal protection, mounted on sealed for life ball bearings, and anti-vibration supports.

Forward curved centrifugal impeller dynamically balanced and directly driven by the motor to provide a smooth airflow through the unit.

Multiple extract points to simultaneously extract condensation from wet rooms and stale air from kitchens and utility rooms:

Ø125mm **outlet** to exhaust air to the outside and 4xØ125mm **inlets** to draw stale air out from inside.

FEATURES & BENEFITS

Ease of installation: wall fixing eyelets integrated into the fan body: anti-vibration supplied.

Compact profile to fit in narrow spaces like false-ceiling or loft spaces.

Top cover easily removable for inspection and maintenance.

Acoustic self-extinguishing foam lining for sound attenuation.

Integral humidity sensor which increases the fan speed by 15%.

Double insulated: no earth connection is required.

Remote monitoring system through CTRL-V3 (supplied as standard) to indicate the ventilation unit status or if any alarm is on.

Tested to the latest standards: units are tested in the TÜV Rheinland recognised laboratory at Aeraulica, meaning accurate, up to date information on electrical safety, performance and noise level that can be relied upon. Designed and manufactured in accordance with EN60335-2-80 (Low Voltage Directive) and the EMC Directive (Electromagnetic Compatibility).

OPERATION

The unit is supplied with a multi.function control panel (CTRL-V3) for control and convenience, providing:


- 3 speed settings (to be set during installation)
- On/Off.
- Boost option.
- Keypad block.
- Alarm indicator.
- Humidistat indicator.



CTRL-V3
(supplied as standard)

QPMEV 125HYP

Example of a complete ventilation system



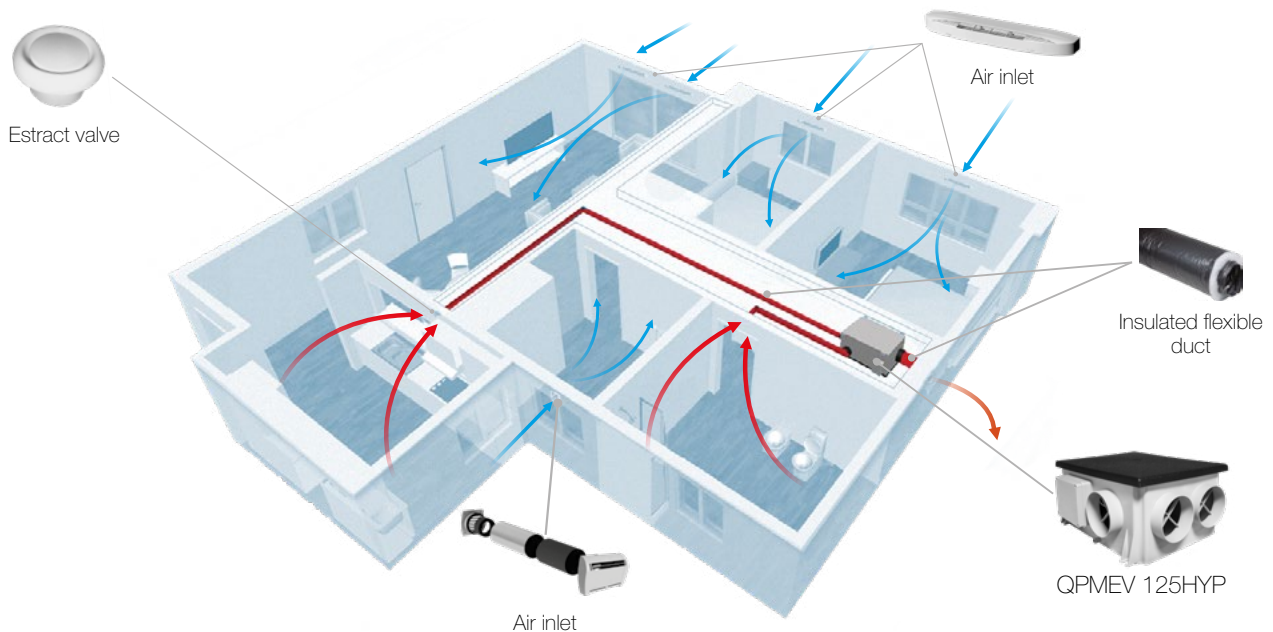


How it works: a continuous running centralised single flow ventilation unit (QPMEV 125 HYP) extracts the stale air from different rooms contemporaneously, with top acoustic comfort. To be used in combination with self-adjusting air inlet. Thanks to the easy-to-fit air distribution system each single ambient can be properly ventilate: the boost function enables rapid extract of increased moisture or pollutant levels. It also provides discrete installation and very quite operation.

Energy saving: the EC brushless motors significantly reduce the electricity consumption.

Indoor Air Quality: a correctly specified mechanical ventilation system can ensure the quality of the indoor air is constantly maintained for the health and well-being of the occupants as well as of the building.

Dimensions (mm) and Weight (kg)

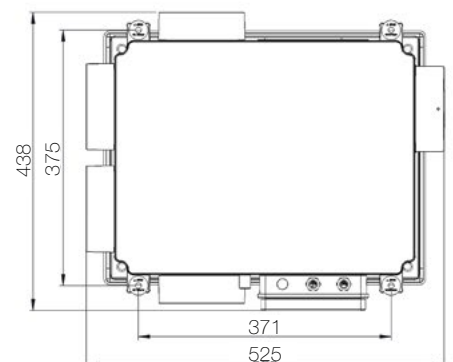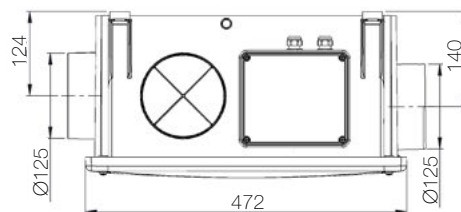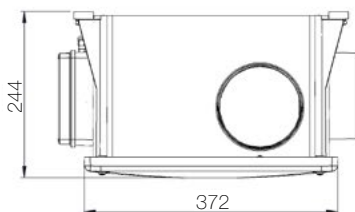


Model	QPMEV 125HYP
Weight	5

QPMEV 125HYP

Product fiche - ErP Directive, Regulations 1253/2014 - 1254/2014

a)	Mark	-	AERAULIQA	
b)	Model	-	QPMEV 125 HYP	
c)	SEC class	-	B	D
c1)	SEC warm climates	kWh/m ² .a	-11,9	-8,6
c2)	SEC average climates	kWh/m ² .a	-27,4	-20,6
c3)	SEC cold climates	kWh/m ² .a	-54,5	-41,6
	Energy label	-	Yes	
d)	Unit typology	-	Residential - unidirectional	
e)	Type of drive	-	Multiple speed drive	
f)	Type of Heat Recovery System	-	Absent	
g)	Thermal efficiency of heat recovery	%	N/A	
h)	Maximum flow rate @ 100 Pa	m ³ /h	239	
i)	Electric power input (maximum flow rate)	W	28	
j)	Sound power level (L _{WA})	dBA	42	
k)	Reference flow rate	m ³ /h	167	
l)	Reference pressure difference	Pa	50	
m)	Specific power input (SPI)	W/m ³ /h	0,054	
n1)	Control factor	-	0,65	0,85
n2)	Control typology	-	Local demand control	Central demand control
o1)	Maximum internal leakage rate	%	N/A	
o2)	Maximum external leakage rate	%	1,8	
p1)	Internal mixing rate	%	N/A	
p2)	External mixing rate	%	N/A	
q)	Visual filter warning	-	N/A	
r)	Instructions to install regulated grilles	-	see installation manual	
s)	Internet address for pre/disassembly instructions	-	www.aerauliqa.com	
t)	Airflow sensitivity to pressure variations	%	N/A	
u)	Indoor/outdoor air tightness	m ³ /h	N/A	
v1)	AEC - Annual electricity consumption - warm climates	kWh	0,4	0,5
v2)	AEC - Annual electricity consumption - average climates	kWh	0,4	0,5
v3)	AEC - Annual electricity consumption - cold climates	kWh	0,4	0,5
w1)	AHS - Annual heating saved - warm climates	kWh	12,8	9,9
w2)	AHS - Annual heating saved - average climates	kWh	28,3	21,9
w3)	AHS - Annual heating saved - cold climates	kWh	55,4	42,9
	Sound pressure @ 3m ⁽¹⁾	dB(A)	14	
	Ambient temperature max	°C	+40	
	Degree of protection	-	X2	
	Marking	-	CE	

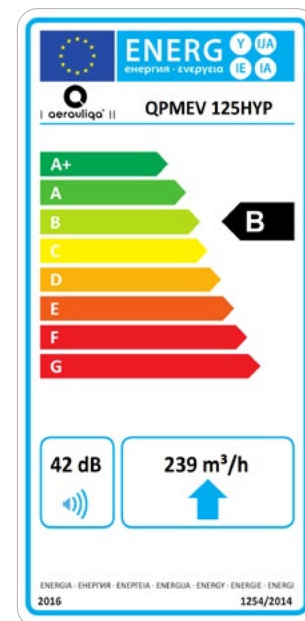

- 230V ~ 50/60Hz.



- air performance measured according to ISO 5801 a 230V 50Hz, air density 1,2Kg/m³.

- data measured in the TÜV Rheinland recognised laboratory in Aerauliqa.

(1) sound pressure level @ 3m in free field, breakout, speed 40%, for comparative purposes only.

QPMEV 125HYP

Performance curve

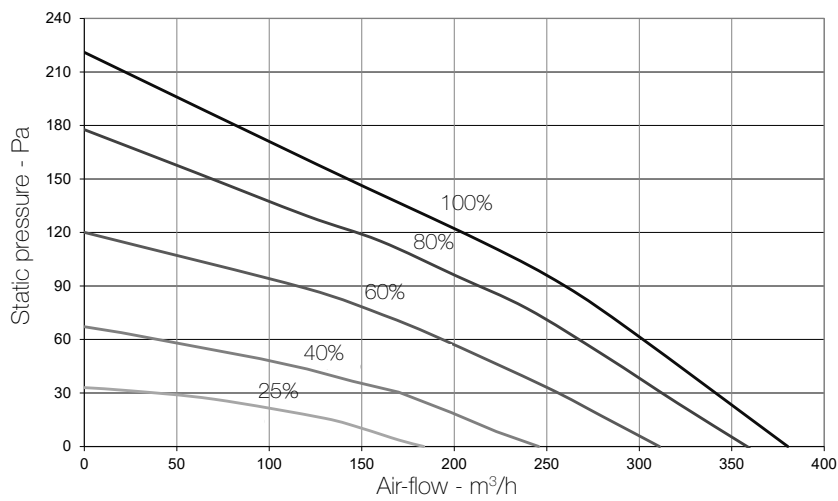

Trimmer Position	Speed %	W max	m³/h max
A	25	5	184
B	30	6	206
C	40	9	246
D	60	17	311
E	80	27	360
F	90	31	372
G	100	35	380

Sound level

	Lw dB - SOUND POWER OCTAVE BAND									Lp dB(A)
	63	125	250	500	1 K	2 K	4 K	8K	Tot	@3m
Speed 100%										
Intake	53	54	57	48	46	41	34	29	60	32
Extract	57	54	53	54	53	51	47	4	62	37
Breakout	52	59	51	48	46	40	32	27	61	30

	Lw dB - SOUND POWER OCTAVE BAND									Lp dB(A)
	63	125	250	500	1 K	2 K	4 K	8K	Tot	@3m
Speed 80%										
Intake	49	48	49	44	41	35	28	24	54	26
Extract	47	47	48	50	47	44	39	34	55	31
Breakout	48	45	44	43	40	33	25	22	52	24

	Lw dB - SOUND POWER OCTAVE BAND									Lp dB(A)
	63	125	250	500	1 K	2 K	4 K	8K	Tot	@3m
Speed 60%										
Intake	43	40	44	41	33	27	24	22	48	21
Extract	43	41	46	44	40	36	30	26	51	25
Breakout	39	39	44	43	33	27	23	19	48	22

	Lw dB - SOUND POWER OCTAVE BAND									Lp dB(A)
	63	125	250	500	1 K	2 K	4 K	8K	Tot	@3m
Speed 40%										
Intake	38	36	44	33	26	21	20	19	46	16
Extract	38	38	40	36	2	30	23	21	45	18
Breakout	36	36	40	32	26	21	19	17	43	14

Lp dB(A) @3m for comparative purposes only